



(11) **EP 1 116 697 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
18.07.2001 Bulletin 2001/29

(51) Int Cl.7: **C03B 37/018, G02B 6/16**

(21) Application number: **01100832.3**

(22) Date of filing: **15.01.2001**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
 Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **14.01.2000 KR 2000001742**

(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD.**
Suwon-City, Kyungki-do (KR)

(72) Inventors:
 • **Lee, Jae-Deuk**
Jeongeup-shi, Jeonrabuk-do (KR)

• **Park, Yong-Woo**
Jongro-gu, Seoul (KR)
 • **Song, Ghie-Hugh**
Seocho-gu, Seoul (KR)
 • **Park, Un Chul Samsung Electronics Co. Ltd.**
Pundang-Gu, Sungnam-Shi, Kyunggi-Do (KR)
 • **Do, Mun-Hyun**
Kumi-shi, Kyonsangbuk-do (KR)

(74) Representative: **Grünecker, Kinkeldey,**
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(54) **Preform for dispersion-managed optical fibre and method of fabricating the preform by modified chemical vapour deposition**

(57) There is provided a dispersion-managed fiber preform and a fabricating method thereof preform by modified chemical vapor deposition (MCVD). A core and a clad having the refractive index distribution of an optical fiber with a positive dispersion value are uniformly deposited in a glass tube. The preform with the positive

dispersion value is heated at every predetermined periods with a torch and the heated preform portions are etched to have a negative dispersion value. Then, the preform alternately having positions with the positive dispersion value and positions with the negative dispersion value along the length direction is collapsed.

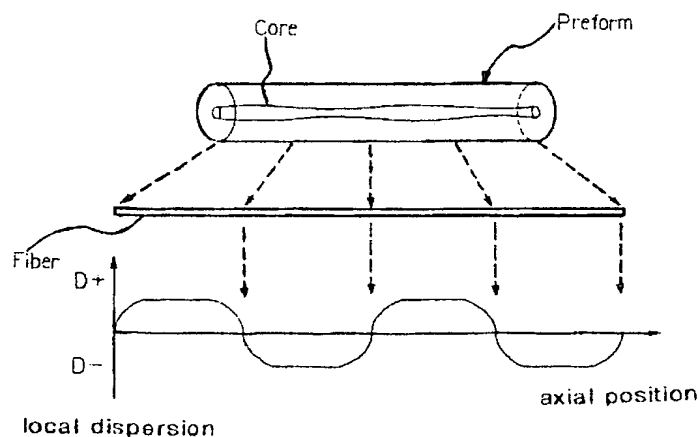


FIG. 2

re Fig 4 in KR-95-111
 re Fig 5 (cal 5)
 (1) by etch
 / Soft (T+) - Soft (T-) / 1/2 molar

Description

[0001] The present invention relates generally to an optical fiber preform and a fabricating method thereof, and in particular, to a dispersion-managed fiber preform and a fabricating method thereof by modified chemical vapor deposition (MCVD).

[0002] Due to the wide bandwidth of optical fibers, optical communication has attracted much interest for long. The optical fibers have a bandwidth so wide that multiple telephone channels and TV channels may be transmitted through a strand of optical fiber as thin as a hair. The transmission capacity of an optical fiber increases as its dispersion value at a transmission wavelength decreases. An optical fiber having a dispersion value of zero at 1550nm, called a dispersion shifted fiber (DSF) has been suggested. Then, an erbium-doped fiber amplifier (EDFA) was developed. The EDFA can amplify an optical signal in a wide wavelength band ranging from 1530nm to 1565nm, thereby rendering the WDM (Wavelength Division Multiplexing) scheme viable and thus further increasing the optical transmission capacity. In the WDM scheme, optical signals of channels at different wavelengths are transmitted via one optical fiber. However, non-linear reaction between signals at different wavelengths like four-wave-mixing significantly deteriorates system performance in WDM optical communication using a DSF.

[0003] Andrew R. Chraplyvy solved this problem by introducing an optical fiber having a dispersion value of 2-6ps/km-nm in an optical transmission wavelength band, as disclosed in U. S. Patent No. 5,327,516 entitled "Optical Fiber for Wavelength Division Multiplexing". The optical fiber having a very low dispersion value for suppression of the non-linear effect is termed an NZDSF (Non-Zero DSF). Major NZDSFs are True WaveTM of Lucent Technology and LEAFTM (Large Effective Area Advantage Fiber) of Corning. The recent TrueWaveTM RS optical fiber of Lucent Technology was designed to have low dispersion values at an L-band (Long-band 1565-1620nm) as well as at a C-band (Conventional-band 1530-1565nm), relative to conventional optical fibers. On the other hand, LEAFTM of Corning has a wide effective area as compared to other optical fibers. For details, refer to U. S. Patent No. 5,835,655 entitled "Large Effective Area Waveguide Fiber" by Yanming Liu, et. al. Another advantage of the NZDSFs is wide effective areas in view of the fact that the non-linear effect of an optical fiber decreases as the effective area of the optical fiber increases.

[0004] Because the dispersion value of an NZDSF is very low but not zero, the product of the dispersion value and a transmission distance continues to increase when the transmission distance is long. As a result, dispersion inevitably results in pulse spreading. To solve this problem, so-called dispersion management was suggested in which two NZDSFs respectively having a positive dispersion value and a negative dispersion val-

ue are alternately connected to a dispersion accumulation and a transmission distance from exceeding a threshold. A dispersion-managed WDM system is an ideal optical transmission system.

[0005] To build a dispersion-managed line, optical fibers respectively having a positive dispersion value and a negative dispersion value are separately fabricated and then alternately connected. This conventional method makes it difficult to install optical communication cables because different kinds of optical fibers must be installed alternately along a long optical fiber line. What is needed is an improved technique for manufacturing dispersion-managed optical fibers from a preform prepared by one continuous session of the MCVD process.

[0006] It is, therefore, an object of the present invention to provide a dispersion-managed fiber preform and a fabricating method thereof by MCVD.

[0007] It is another object of the present invention to provide a dispersion-managed fiber preform with a positive dispersion value for a first predetermined length and a negative dispersion value for a second predetermined length.

[0008] It is a further object of the present invention to provide a dispersion-managed fiber preform from which an optical fiber is drawn to have a positive dispersion value for a first predetermined length and a negative dispersion value for a second predetermined length.

[0009] It is still another object of the present invention to provide a dispersion-managed fiber preform uniformly deposited lengthwise and selectively etched to have different refractive indexes profiles along the length direction prior to tube sealing by MCVD and a fabricating method thereof.

[0010] It is yet another object of the present invention to provide a dispersion-managed fiber preform that has the refractive index distributions of an NZDSF+ and an NZDSF- by making core portions different in thickness and an identical refractive index distribution in the other core portion.

[0011] To achieve the above objects, a core and a clad having the refractive index distribution of an optical fiber with a positive dispersion value are uniformly deposited in a glass tube. The preform with the positive dispersion value is heated at every predetermined periods with a heater and then the heated preform portions are etched by fluorine to have a negative dispersion value. Then, the preform alternately having positions with the positive dispersion value and positions with the negative dispersion value along the length direction is collapsed. Thus, a dispersion-managed fiber preform is completed.

[0012] The above and other objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which:

FIG. 1 is a schematic view of a general fiber preform fabricating apparatus using MCVD;

FIG. 2 illustrates the preform, the resulting optical fiber, and the local dispersion along the axial fiber length according to the present invention;

FIG. 3 illustrates the periodic etching of the MCVD tube to periodically change the refractive index profiles of the preform;

FIG. 4 is a graph showing the refractive index distribution of the dispersion-managed fiber preform according to the present invention; and

FIG. 5 is a graph showing dispersion spectra of an optical fiber having the refractive index distribution shown in FIG. 3 at 1530 to 1565nm.

[0013] A preferred embodiment of the present invention will be described hereinbelow with reference to the accompanying drawings. In the following description, well-known functions or constructions are not described in detail since they would obscure the invention in unnecessary detail.

[0014] Referring to FIG. 1, MCVD will be described in brief. A glass tube T is fixed to both chucks 12 mounted on a horizontal shelf, rotated in the direction indicated by an arrow (1), and heated by a torch 14 while the torch 14 is rotated in the direction indicated by an arrow (3). At the same time, SiCl_4 and other chemical gases along with oxygen gas are injected into the glass tube T in the direction indicated by an arrow (2), for deposition inside the glass tube T. After the deposition, collapsing and closing are implemented. In this manner, a fiber preform is fabricated. The MCVD is well known to those that have ordinary knowledge in the field.

[0015] The MCVD is the process of supplying the SiCl_4 and other chemical gases along with oxygen gas the glass tube T, while heating the glass tube T by moving the torch at a predetermined rate, for uniform lengthwise deposition. This is a very difficult task.

[0016] In order to fabricate an optical fiber cable having a positive dispersion value alternating with a negative dispersion value along the length direction of the fiber, an optical fiber preform must be developed in a controlled manner in which a refractive index distribution corresponding to the positive dispersion of the optical fiber for a first predetermined length alternates with a refractive index distribution corresponding to the negative dispersion of the optical fiber for a second predetermined length along the length direction. FIG. 2 illustrates such an optical fiber preform that exhibits this alternative refractive index characteristics. Accordingly, FIG. 2 illustrates the principle of eliminating signal distortion due to dispersion accumulation according to the present invention despite having a non-zero dispersion value in an optical transmission wavelength band.

[0017] The refractive index distribution of an optical fiber (NZDSF+) having a positive dispersion value as low as 2.56ps/km-nm in an optical transmission wavelength band and the refractive index distribution of an optical fiber (NZDSF-) having a negative dispersion value is provided so that an optical fiber preform exhibiting

the characteristics of FIG. 2 is obtained. To this end, two different refractive index distributions must alternate periodically along the length direction in an optical fiber preform, which is fabricated by the modified chemical vapor deposition (MCVD) process in accordance with the present invention and has the same composition profile as the final fiber.

[0018] The present invention is intended to find out the refractive index distributions of the NZDSF+ and NZDSF- that enable fabrication of an optical fiber preform having the characteristics shown in FIG. 2 and to provide a method of fabricating the optical fiber preform by MCVD.

[0019] In the present invention, to induce a lengthwise change in a refractive index distribution in fabrication of an optical fiber preform by MCVD, the fiber preform is uniformly deposited along the length direction and selectively etched in intended portions for refractive index variation using a torch just before collapsing of a tube. Motion of a torch 14 is modulated to achieve periodic etching while He/O_2 gases mixed with F-containing gas such as CF_4 are flowed into the tube just prior to final sealing of the collapsed tube, as shown in FIG. 3.

[0020] The non-etched and etched sections of the preform should be designed to have positive and negative dispersion values, respectively. Therefore, the refractive index profile which has the positive dispersion in the original shape of the refractive index profile, and has the negative dispersion in the shape formed by internal etching should be found. The two index profiles also should satisfy all other nodal characteristics of the single-mode fiber waveguide such as the mode-field diameter, the cut-off wavelength, and the bending-loss requirement.

[0021] FIG. 4 is a graph showing a refractive index distributions of a dispersion-managed optical fiber preform satisfying the above-described condition according to the present invention. A refractive index difference in quantity, $\Delta(\%)$ is defined as

$$\Delta(\%) = [(n(r) - n_c) / n_c] \times 100 \quad (1)$$

where n_c is the refractive index of pure glass.

[0022] Thus, a fabrication of a dispersion-managed fiber from a preform prepared by a single session of the MCVD process is possible in the present invention.

[0023] FIG. 5 illustrates dispersion values of optical fibers having the refractive index distribution shown in FIG. 4 in a wavelength band ranging from 1530 to 1565nm. A positive dispersion fiber (NZDSF+) has a positive inclination as wavelength increases, whereas a negative dispersion fiber (NZDSF-) has a negative inclination as wavelength increases, but they have the same magnitude of dispersion. Therefore, if the transmission fiber has the refractive index profiles shown in FIG. 4 periodically along the fiber length, complete dispersion

management is achieved across the whole wavelength band of 1530 to 1565nm.

[0024] As to the positive dispersion fiber, a dispersion ranges from 4.10 to 4.36ps/km-nm at wavelengths from 1530 to 1565nm, a dispersion inclination at 1550nm is 0.0065ps/km-nm², an LP_H mode cut-off wavelength is 1.17μm, and a mode filter diameter at 1550nm is 7.56μm.

[0025] As to the negative dispersion fiber, a dispersion ranges from -4.19 to -5.61ps/km-nm at wavelengths from 1530 to 1565nm, a dispersion inclination at 1550nm is -0.0358ps/km-nm², an LP_H mode cut-off wavelength is 1.14μm, and a mode filter diameter at 1550nm is 8.39μm.

[0026] The optical fibers having the refractive index distribution shown in FIG. 4 have small dispersion inclinations at wavelengths as shown in FIG. 5. Therefore, they can be used as an excellent NZDSF+ and NZDSF-.

[0027] In accordance with the present invention, a dispersion-managed optical fiber is drawn from a single optical fiber preform, as effective as NZDSFs of a positive dispersion value and a negative dispersion value, respectively, that alternate with each other. When an optical fiber of a uniform diameter is drawn from an optical fiber preform according to the present invention and made into an optical cable, the cable itself becomes a dispersion management line. Furthermore, since positive and negative dispersion optical fibers having a refractive index distribution according to the present invention show very flat dispersion spectra at transmission wavelengths, they can be used as an excellent NZDSF+ and NZDSF-.

[0028] While the invention has been shown and described with reference to a certain preferred embodiment thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the appended claims.

Claims

1. A method of fabricating a dispersion-managed optical fiber preform from a positive color dispersion preform structure using modified chemical vapor deposition (MCVD), said positive color dispersion preform structure comprising a core and a cladding having the refractive index distribution of an optical fiber with a positive color dispersion value, the method comprising the steps of:

uniformly depositing said positive color dispersion preform structure in a glass tube (T);

heating the positive color dispersion preform structure at predetermined alternating portions with a heater (14) and etching the heated portions to have a negative color dispersion value;

and

collapsing the glass tube.

2. The method of claim 1, wherein the step of etching the heated portions includes the step of etching said core.
3. The method of claim 1 or 2, wherein the step of etching the heated portions includes the step of injecting an F-containing gas.
4. The method of claim 3, wherein said F-containing gas is CF₄ or C₂F₆.
5. The method of claim 1, wherein periodic etching of the MCVD tube is achieved by the modulation of the torch motion while He/O₂ gases mixed with F-containing gas is injected into the tube.
6. An optical fiber preform fabricated by modified chemical vapor deposition (MCVD), comprising:
 - first fiber preform portions having the refractive index distribution of an optical fiber with a positive color dispersion value along the length direction; and
 - second fiber preform portions alternating with the first fiber preform portions and having the refractive index distribution of an optical fiber with a negative color dispersion value along the length direction, the second fiber preform portions being generated by heating.
7. The optical fiber preform of claim 6 fabricated by a method of one of claims 1 to 5.

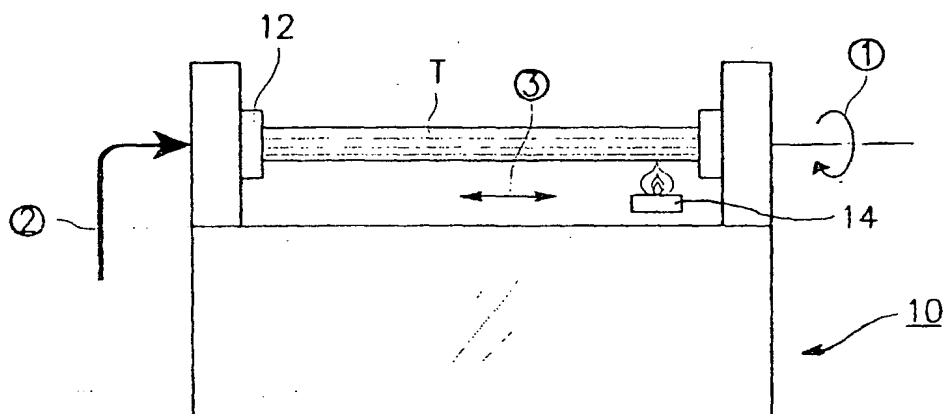


FIG. 1

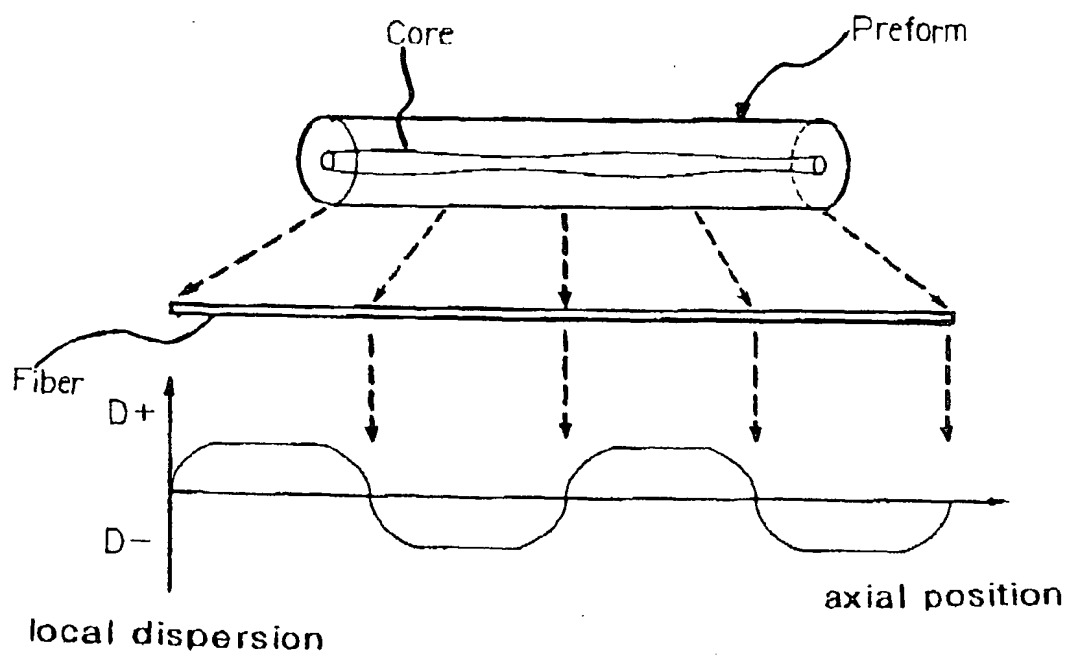


FIG. 2


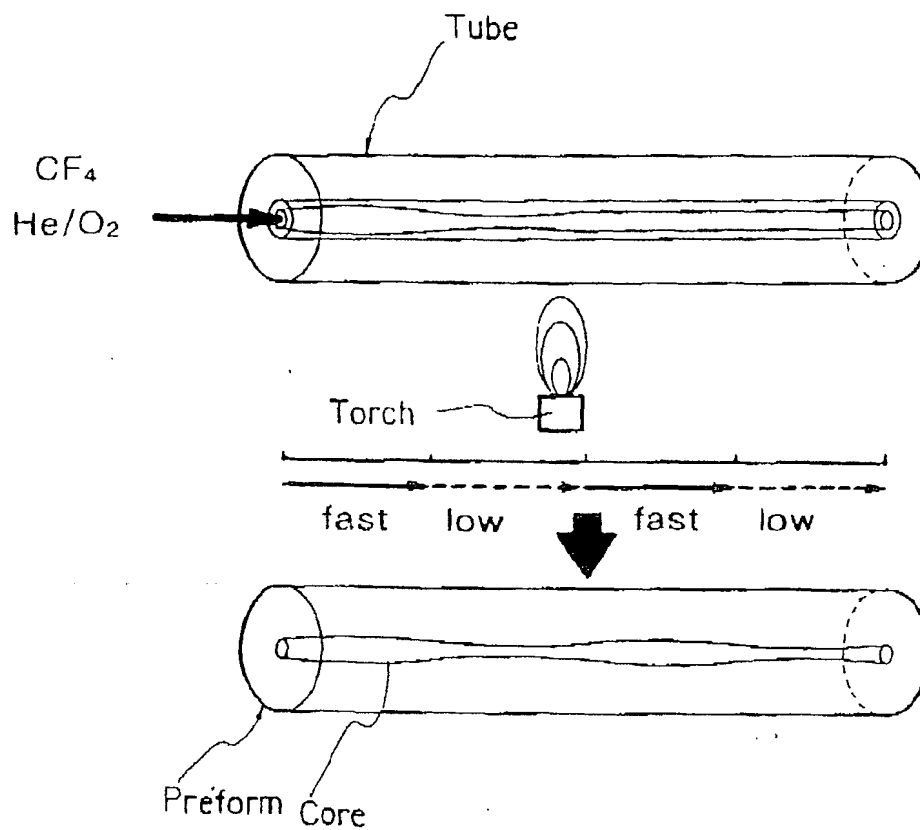


FIG. 3

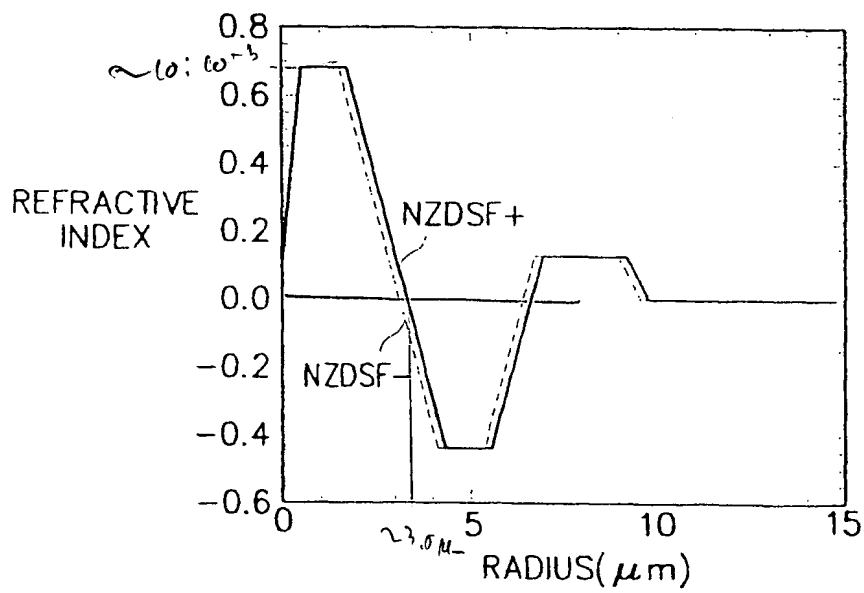

*palatable
ds plays
R5-R9-R11*

FIG. 4


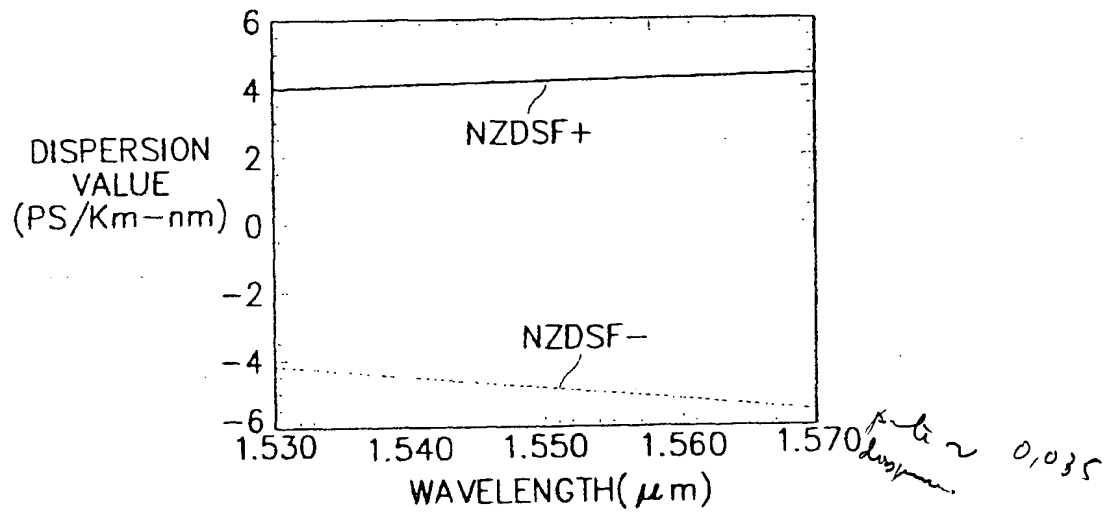


FIG. 5



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 116 697 A3**

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
26.06.2002 Bulletin 2002/26

(51) Int Cl.7: **C03B 37/018, G02B 6/16**

(43) Date of publication A2:
18.07.2001 Bulletin 2001/29

(21) Application number: **01100832.3**

(22) Date of filing: **15.01.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

- Park, Yong-Woo
Jongro-gu, Seoul (KR)
- Song, Ghie-Hugh
Seocho-gu, Seoul (KR)
- Park, Un Chul Samsung Electronics Co. Ltd.
Pundang-Gu, Sungnam-Shi, Kyunggi-Do (KR)
- Do, Mun-Hyun
Gu, Sungnam-Shi, Kyunggi-do (KR)

(30) Priority: **14.01.2000 KR 2000001742**

(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD.**
Suwon-City, Kyungki-do (KR)

(74) Representative: **Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)**

(72) Inventors:
• Lee, Jae-Deuk
Jeongeup-shi, Jeonrabuk-do (KR)

(54) **Preform for dispersion-managed optical fibre and method of fabricating the preform by modified chemical vapour deposition**

(57) There is provided a dispersion-managed optical fiber preform and a fabricating method thereof by modified chemical vapor deposition (MCVD). A core and a clad having the refractive index distribution of an optical fiber with a positive dispersion value are uniformly deposited in a glass tube. The preform with the positive

dispersion value is heated at predetermined periods with a torch and the heated preform portions are etched to have a negative dispersion value. Then, the preform alternately having positions with the positive dispersion value and positions with the negative dispersion value along the length direction is collapsed.

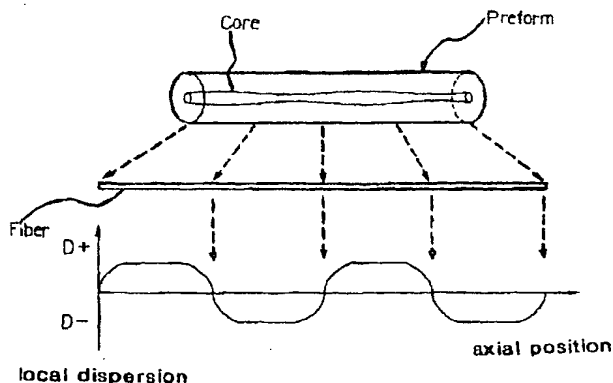


FIG. 2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 10 0832

DOCUMENTS CONSIDERED TO BE RELEVANT				
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)	
X	US 4 049 413 A (FRENCH W G) 20 September 1977 (1977-09-20)	6,7	C03B37/018 G02B6/16	
A	* column 7, line 6 - line 27; claims 1-3,11; figures 3-5 *	1		
X	PATENT ABSTRACTS OF JAPAN vol. 5, no. 58, 21 April 1981 (1981-04-21) -& JP 56 009236 A (FUJITSU LTD), 30 January 1981 (1981-01-30)	6,7		
A	* abstract; figures 1-3 *	1		
X	PATENT ABSTRACTS OF JAPAN vol. 5, no. 62, 25 April 1981 (1981-04-25) -& JP 56 014431 A (FUJITSU LTD), 12 February 1981 (1981-02-12)	6,7		
A	* abstract; figure 2 *	1		
X	PATENT ABSTRACTS OF JAPAN vol. 5, no. 62, 25 April 1981 (1981-04-25) -& JP 56 014433 A (FUJITSU LTD), 12 February 1981 (1981-02-12)	6,7		TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	* abstract; figure 2 *	1		
X	PATENT ABSTRACTS OF JAPAN vol. 5, no. 67, 7 May 1981 (1981-05-07) & JP 56 017941 A (FUJITSU LTD), 20 February 1981 (1981-02-20)	6,7		C03B
A	* abstract *	1		
A	US 4 857 091 A (GEITTNER P E E ET AL) 15 August 1989 (1989-08-15) * column 4, line 17 - line 44 *	1,6,7		
A	US 4 076 380 A (DIMARCELLO F V ET AL) 28 February 1978 (1978-02-28) * column 2, line 45 - column 3, line 21 *	1,6,7		
The present search report has been drawn up for all claims				
Place of search THE HAGUE		Date of completion of the search 24 April 2002	Examiner Stroud, J	
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>				

EPC FORM 1503 03/82 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 10 0832

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-04-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4049413	A	20-09-1977	NONE	
JP 56009236	A	30-01-1981	NONE	
JP 56014431	A	12-02-1981	NONE	
JP 56014433	A	12-02-1981	NONE	
JP 56017941	A	20-02-1981	NONE	
US 4857091	A	15-08-1989	DE 3635034 A1	21-04-1988
			EP 0264154 A2	20-04-1988
			JP 63303824 A	12-12-1988
US 4076380	A	28-02-1978	NONE	

EPO FORM P0489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000